



Rated voltage	1,1 kV.
Rated current	1600 A
One minute withstand (Power frequency)	10 kV.
Full vave withstand test (Impulse voltage)	20 kV.
Overall creepage	75 mm
Cover Hole	70 mm

Pos. No.	Description	Material	Pcs.
1	Porcelain A (A-2000 DIN 42530 )	C110	1
2	Porcelain B (B-2000 42530)	C110	1
3	Flag	CuZn40Pb2	1
	Stem	Cu-ETP	1
4	Brass Washer E	CuZn40Pb2	1
5	Brass Nut M24 DIN 936	CuZn40Pb2	4
6	Flange Gasket N (DT 2000 DIN 42530)	NBR	1
7	Internal Gasket O (DT 2000 DIN 42530)	NBR	1
8	Internal Gasket P (DT 2000 DIN 42530)	NBR	1
9	Plain Gasket M (DT 2000 DIN 42530)	NBR	1

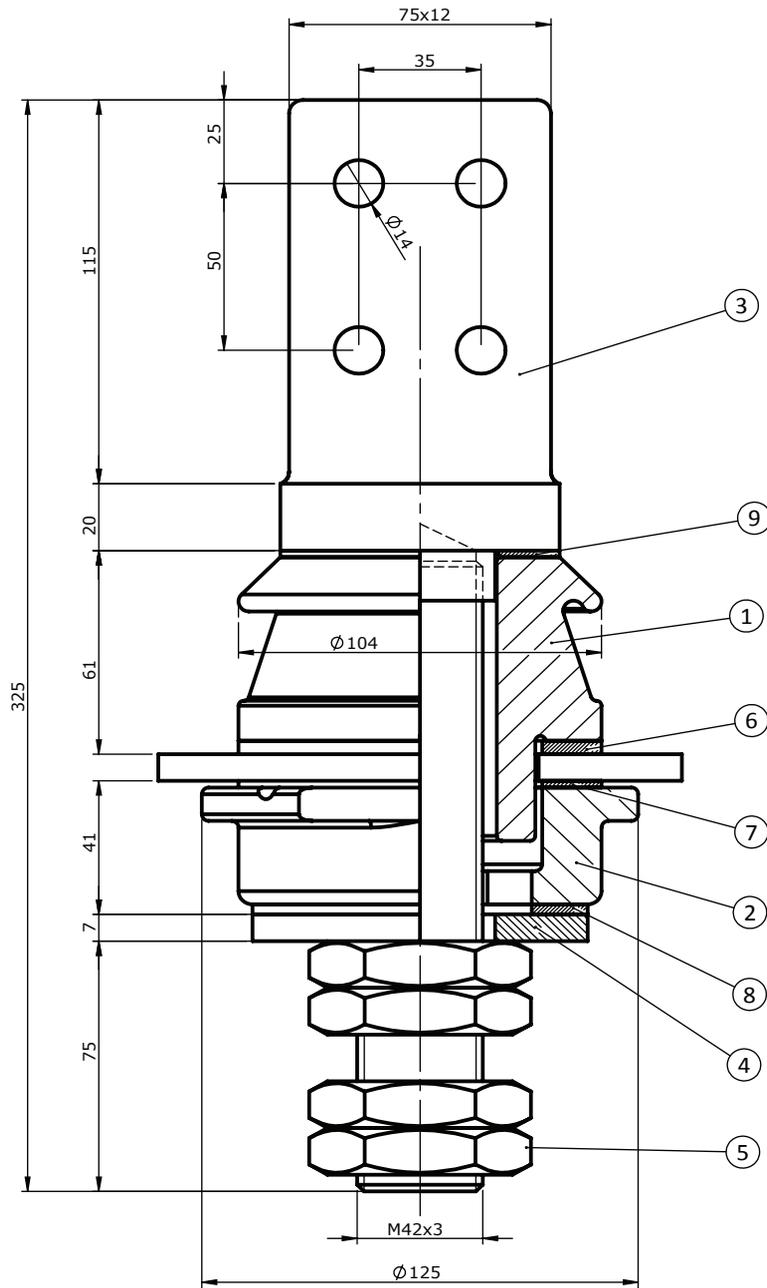

Rated voltage	
Rated Current	
One Minute Withstand (Power frequency)	
Full Vave Withstand Test (Impulse voltage)	
Overall Creepage	
Cover Hole	

Pos. No.	Description	Material
1	Porcelain A (A-2000 DIN 42539 )	C110
2	Porcelain B (B-2000 42539)	C110
3	Flag	CuZn40Pb2
4	Stem	Cu-ETP
5	Brass Washer E	CuZn40Pb2
6	Brass Nut M42 DIN 936	CuZn40Pb2
7	Flange Gasket N (DT 2000 DIN 42539)	NBR
8	Internal Gasket O (DT 2000 DIN 42539)	NBR
9	Internal Gasket P (DT 2000 DIN 42539)	NBR
10	Plain Gasket M (DT 2000 DIN 42539)	NBR

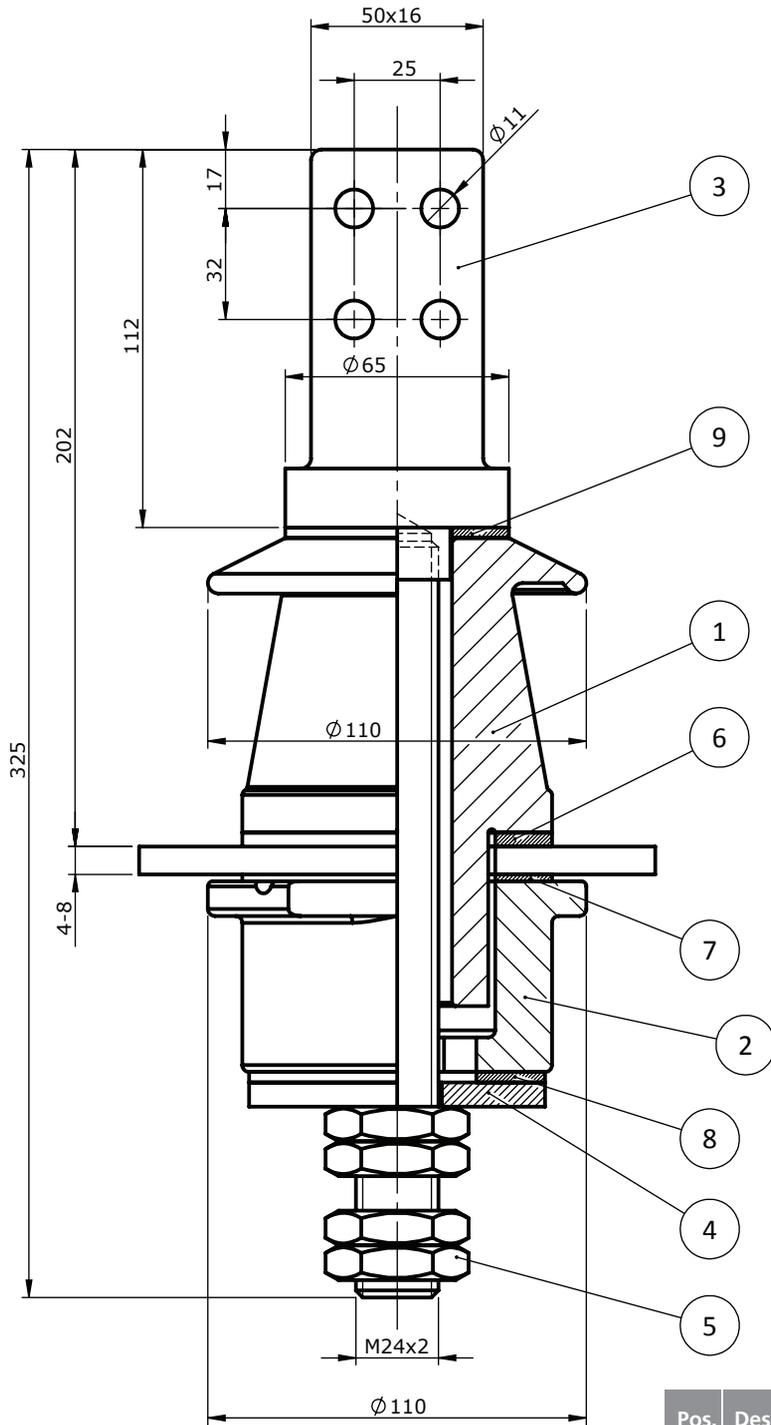


Cover Hole :  $\varnothing 56\text{mm}$



1. This is bushing generally meets the requirement DF DIN Standard 42539 (A 3-1000)
2. Standart BIL
3. Mounting hole size:56mm
4. Minimum creepage distance : 125mm
5. Bushing packing weight : 7kg (Approx)

Pos. No.	Description	Material	Pcs.
1	Porcelain A (A-1000 DIN 42539 )	C110	1
2	Porcelain B (B-1000 42539)	C110	1
3	Flag	CuZn40Pb2	1
4	Stem	Cu-ETP	1
5	Brass Washer E	CuZn40Pb2	1
6	Brass Nut M24 DIN 936	CuZn40Pb2	4
7	Flange Gasket N (DT 1000 DIN 42539)	NBR	1
8	Internal Gasket O (DT 1000 DIN 42539)	NBR	1
9	Internal Gasket P (DT 1000 DIN 42539)	NBR	1
10	Plain Gasket M (DT 1000 DIN 42539)	NBR	1

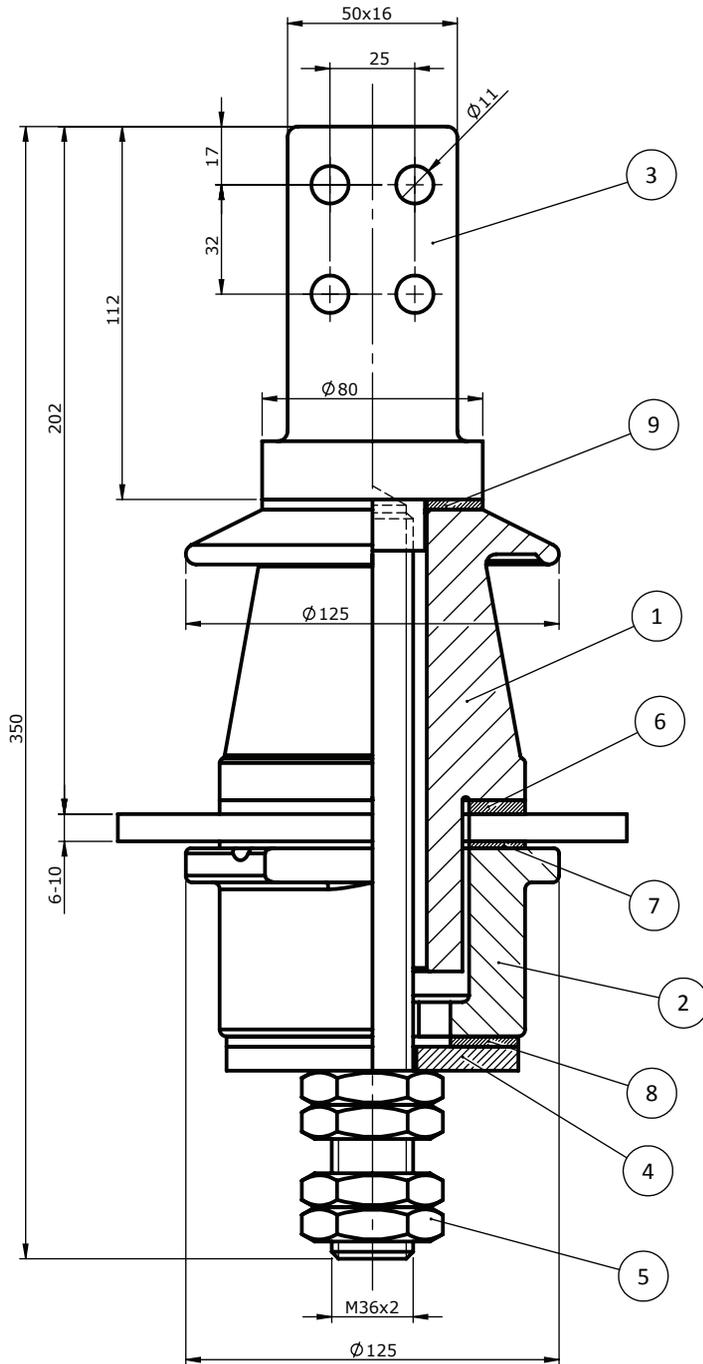


Cover Hole :  $\varnothing 70\text{mm}$



- 1. This is bushing generally meets the requirement DP DIN Standard 42539 (DT 2000)
- 2. Standart BIL level
- 3. Mounting hole size: 70mm
- 4. Brass Flag ti DIN standard 43675 FP
- 5. Minimum creepage distance : 125mm
- 6. Bushing packing weight : 17kg (Approx)

Pos. No.	Description	Material	Pcs.
1	porcelain A (A-2000 DIN 42539 )	C110	1
2	porcelain B (B-2000 42539)	C110	1
3	Flag	CuZn40Pb2	1
4	Stem	Cu-ETP	1
5	Brass Washer E	CuZn40Pb2	1
6	Brass Nut M36 DIN 936	CuZn40Pb2	4
7	Flange Gasket N (DT 2000 DIN 42539)	NBR	1
8	Internal Gasket O (DT 2000 DIN 42539)	NBR	1
9	Internal Gasket P (DT 2000 DIN 42539)	NBR	1
10	Plain Gasket M (DT 2000 DIN 42539)	NBR	1


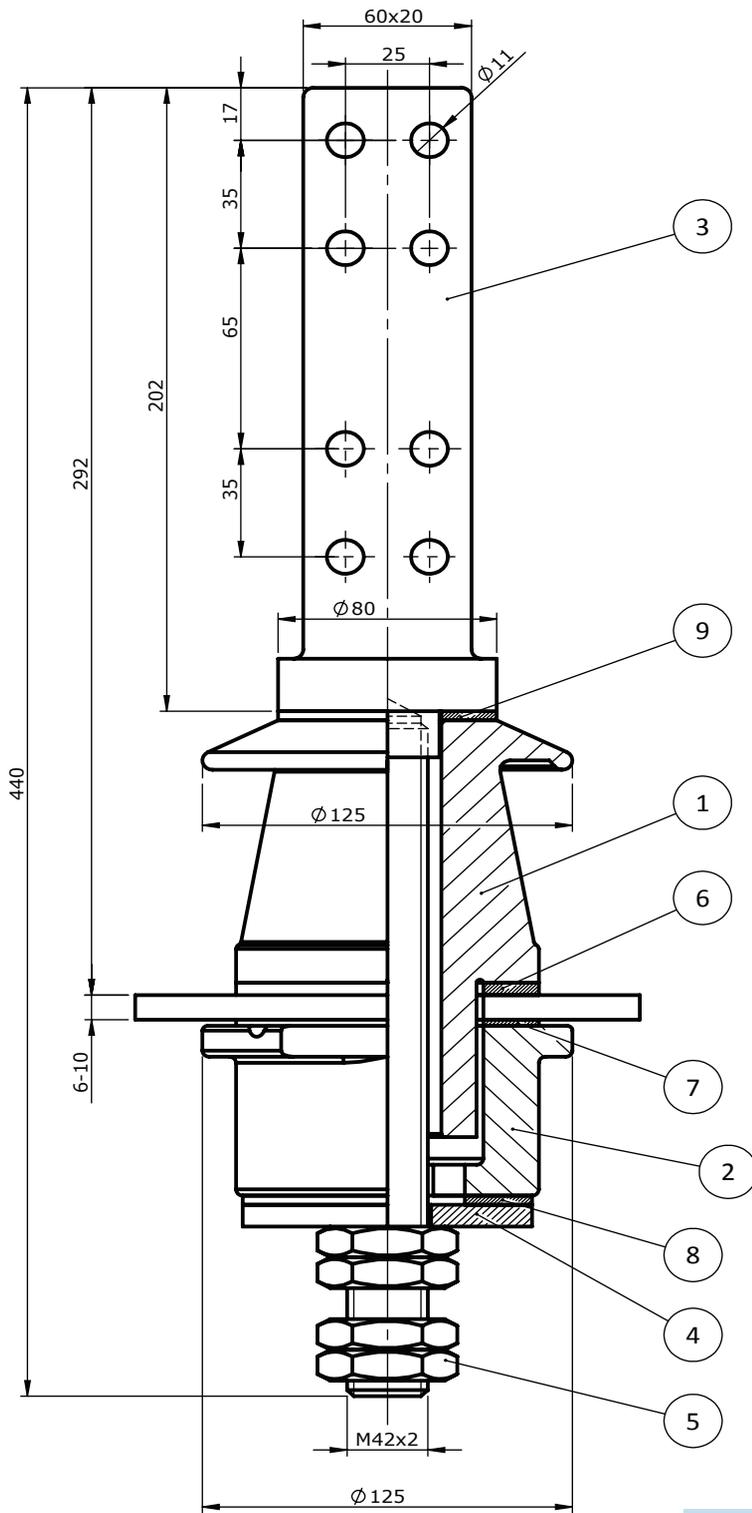


Cover Hole :  $\varnothing 70\text{mm}$



- 1. This is bushing generally meets the requirement DF DIN Standard 42539 (A 3-1000)
- 2. Standart BIL
- 3. Mounting hole size:56mm
- 4. Brass Flag to DIN standart 43675 FP
- 5. Minimum creepage distance : 125mm
- 6. Bushing packing weight : 7kg (Approx)

Rated Voltage	1,1 kV
Rated Current	1600 A
One Minute Withstand (Power frequency)	10 kV
Full Wave Withstand Test (Impulse voltage)	20 kV
Overall Creepage	75 mm
Cover Hole	70 mm

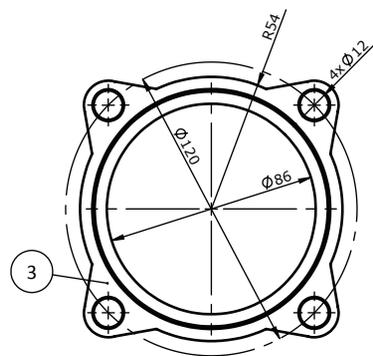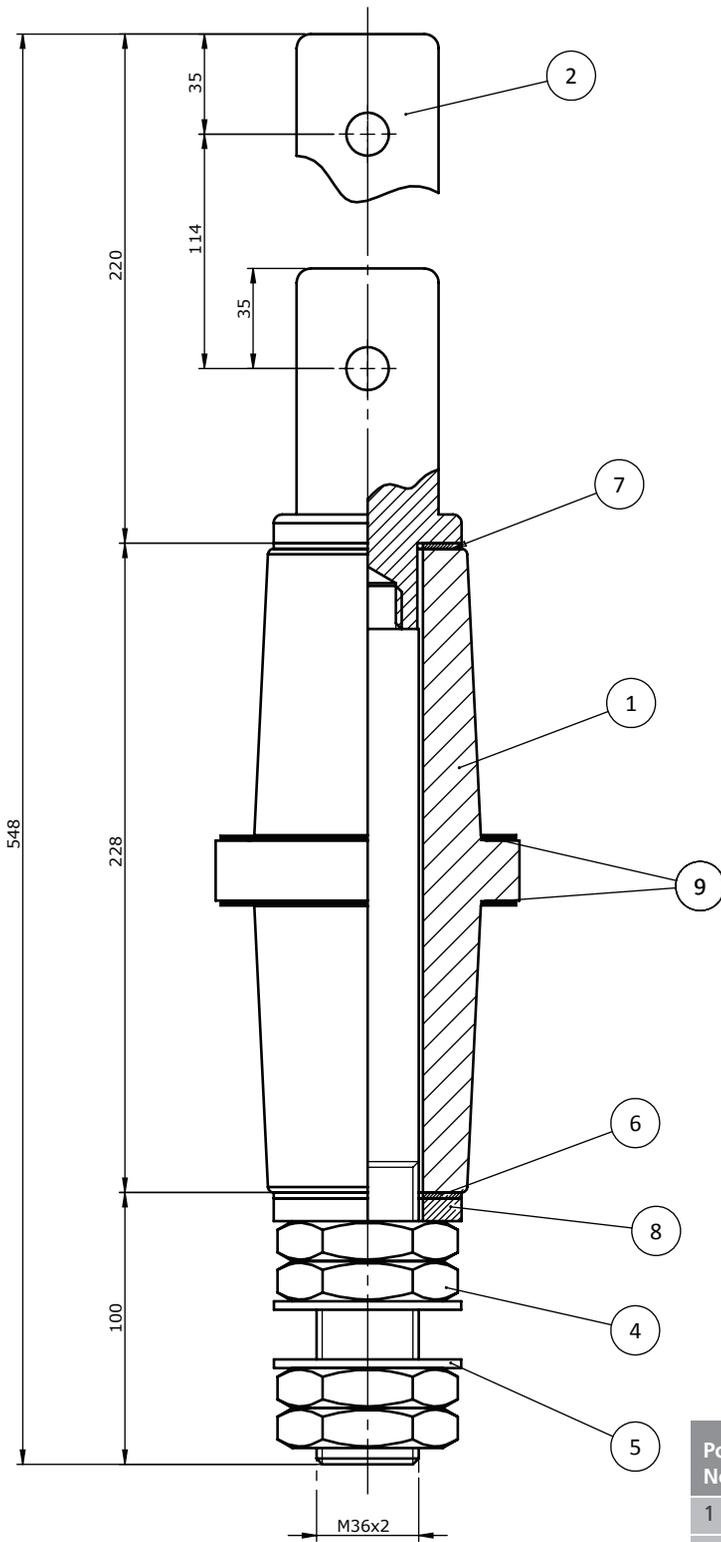

Mounting hole size: 83 dia.  
welded stud M10x60 long  
(Not supplied)

Pos. No.	Description	Material	Pcs.
1	Porcelain A	C110	1
2	Stem	CuZn40Pb2	1
3	fixing Ring	CuZn40Pb2	1
4	Brass Nut M36 DIN 936	CuZn40Pb2	1
5	Washer For M36	CuZn40Pb2	4
6	internal Gasket X	NBR	1
7	plain Gasket M	NBR	1
8	Brass Washer G	CuZn40Pb2	2
9	Flange Gasket N	NBR	1